


Duplex Packing Filler (3 load cells structure) AF-25KII



5-25kg
Weighing range

±5~15g
Accuracy range

2400 Pcs/h
Top speed

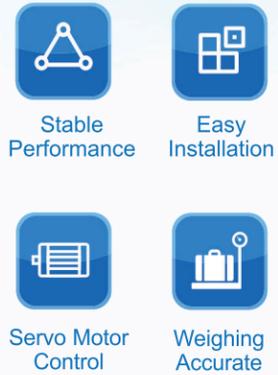

Features:

- **Granular material:** design for plastic particle, granular fertilizer, feeds and other granular material;
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** weighing range is 5-25kg, Speed can reach 2400 pcs/h, and accuracy range $\pm 5\sim 15g$.




Optional:



Bag Clamp

- SS304 stainless steel.



vibrator feeding


Specification

| | |
|---------------------|---|
| Model | PaxGO AF-25KII (3 load cells structure) |
| Weighing range | 5~25Kg |
| Division | 1g |
| Accuracy range* | $\pm 5\sim 15g$ |
| Top speed* | 2400pcs/h |
| Volume | 55L x 2 |
| Feeding method | Feeding control by servo, pneumatic discharging |
| Material | SS304, carbon steel |
| I/O | 8 output(5V), 8 input(24V) |
| Communication | RS485, Modbus TCP/IP |
| Pneumatic | 0.4~0.6MPa |
| Power | Single Phase AC-220V $\pm 10\%$, 50/60HZ, 2KW |
| Working environment | 0~40°C, 90%R.H condensation is not allowed |

*Accuracy and speed depends on the material characteristics and packing weight.

Structure & Dimension

Unit: mm

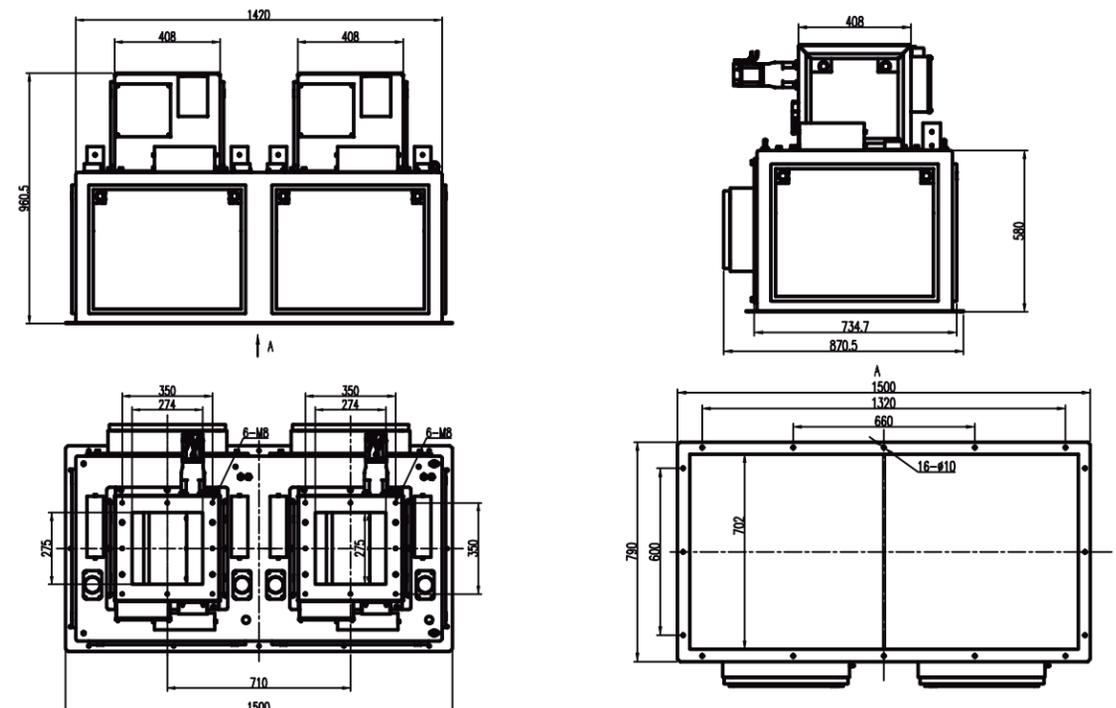

*Specification and dimension may be upgraded, please consult sales manager for the latest info.