

# DUPLEX PACKING FILLER AF-10KII



**0.5-10kg**  
Weighing range



Stable  
Performance



Easy  
Installation

**±2~10g**  
Accuracy range



Servo Motor  
Control



Weighing  
Accurate

**2400** Pcs/h  
Top speed

## Features:

- **Granular material:** design for rice, millet, beans and other granular material;
- **Easy dismounting:** module design of measuring hopper for easy cleaning;
- **Parameter setting:** self-adjust function with target value set only;
- **Stable performance:** servo motor controls feeding process;
- **Fast and accurate:** weighing range is 0.5-10kg, Speed can reach 2400 pcs/h, and accuracy range  $\pm 2\sim 10g$ .



## Optional:



10-inch touch screen

User-friendly interface design,  
vivid display, easy to operate.


## Specification

Model	PaxGO AF-10KII
Weighing range	0.5~10Kg
Division	1g
Accuracy range*	$\pm 2\sim 10g$
Top speed*	2400 pcs/h
Volume	18L x 2
Feeding method	Servo motor + feeding vibrator , pneumatic discharging
Material	SS304,carbon steel
I/O	8 output(5V),8 input(24V)
Communication	RS485, Modbus TCP/IP
Pneumatic	0.4~0.6MPa
Power	Single Phase AC-220V $\pm 10\%$ ,50/60HZ,1KW
Working environment	0~40°C , 90%R.H condensation is not allowed

\*Accuracy and speed depends on the material characteristics and packing weight.

## Structure & Dimension

Unit: mm

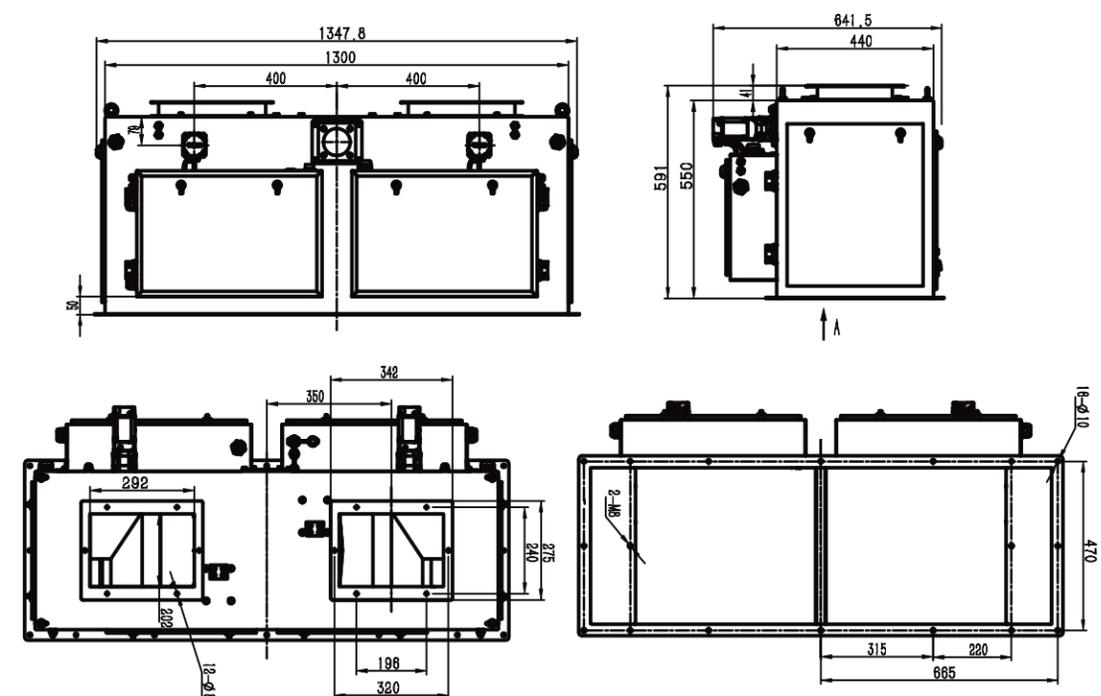

\*Specification and dimension may be upgraded, please consult sales manager for the latest info.